



WAVE S9065TC - 9W

Dimmable LED downlight, CRI90 with selectable CCT and flickerCONTROLLED technology, IP44

Application

Ideal for any residential or commercial interior space

Design Specifications

- Selectable CCT 3000K/4000K/5700K, CRI90
- Poly covered aluminium body, quality opal polycarbonate diffuser
- Integral flickerCONTROLLED trailing edge dimmable LED driver, with flex and plug
- High efficiency LED optics
- Deco ring options:
Satin Nickel (S9065SN/RING),
Black (S9065BK/RING)
- IC - 4 rated, double insulated



Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing edge**



Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9065TC WH	240	9	750/850/800	3000/4000/5700	90
	S9065TC/WH/K10P	240	9	750/850/800	3000/4000/5700	90
	S9065SN/RING					
	S9065BK/RING					

Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)	IPART
YES	90	WHITE	92	113	59(H)	YES
YES	90	WHITE	92	113	59(H)	YES
	90	SATIN NICKEL				
	90	BLACK				

REES	VEET
YES	YES
YES	YES

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

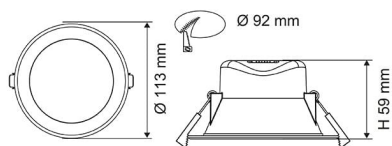

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9065TC at 3000K

